

Genesol 32

Biocidal Cleaner/Preservative

G E N E S Y S
I N T E R N A T I O N A L

www.genesysro.com

The Complete Solution

Cleans Biological fouling



Preservative



- ✓ Suitable for Reverse Osmosis (RO) and Nano-Filtration (NF) membranes
- ✓ Effective against most micro-organisms
- ✓ Long lasting
- ✓ Compatible with all polyamide membranes
- ✓ Easily deactivated to harmless by-products
- ✓ Can be used to clean pre-treatment systems
- ✓ Can be used for membrane preservation and storage

Typical properties

Appearance: white/yellow liquid
pH as supplied: 3.0 – 5.0
Specific gravity: 1.04 - 1.10
Freezing point: < - 1°C

Description

Genesol 32 is a broad-spectrum biocide for use in cleaning Reverse Osmosis and Nano-Filtration systems. It can be used both on and off-line to eliminate microbiological fouling but when used in potable water applications, Genesol 32 should be used 'off-line'.

Genesol 32 can be used in pre-treatment systems for the prevention of biofouling in pumps, tanks and pipe-work. It is deactivated to harmless by-products by using sodium bisulphite.

Application

When cleaning fouled membranes 'off-line', Genesol 32 should be dosed at 1,000-1,500mg/L for 6-8 hours. Following use, the membranes should be flushed and cleaned using an alkaline detergent such as Genesol 36 or Genesol 40. When used 'on-line' Genesol 32 should be dosed at 700-1000 mg/L for 8-12 hours once every 5 to 21 days depending on the severity of the fouling.

Genesol 32 has good biostatic properties and can be used for membrane preservation and storage as per the guidelines below:

24-36 hours	300mg/l = 0.03%
36-168 hours	500mg/l = 0.05%
1-4 weeks	800mg/l = 0.08%
1-6 months	1000mg/l = 0.1%
>6 months	drain & refill every 6 months

Genesol 32 can be diluted and is fully miscible with water in all proportions.

Health and Safety


Genesol 32 is an aqueous solution containing mixed isothiazolinones. It is corrosive to carbon steel and certain other alloys so all pumps, pipe-work and tanks should be made from acid resistant material. A material safety data sheet is available on request.

Classification

CHIP: Corrosive | UN: Corrosive

Packaging

Available in 25 kg kegs and 200 kg drums.
The shelf life is 12 months under normal storage conditions.

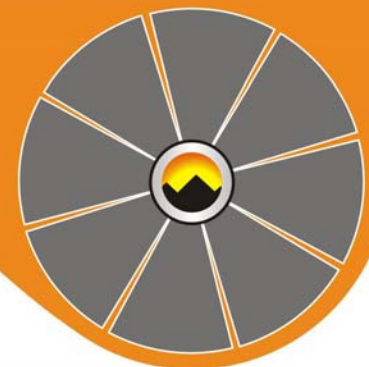

For more information contact:

Genesys International Ltd.
Unit 4, Ion Path, Road One, Winsford Ind. Estate,
Winsford, Cheshire, CW7 3RG, UK
Tel: + 44 1628 622 195
E-mail: info@genesysro.com
www.genesysro.com

Genesys Latin America - Chile
Genesys North America - USA
Genesys Pacific - Singapore
Genesys Membrane Products - Spain

Release 09/05/2008